



Better Chemistry. **Better Business.**

Aquastrip ACB

Product Code: 2572004
Revised Date: 05/04/12

Aquastrip ACB

DESCRIPTION

Aquastrip ACB is a mildly acidic liquid concentrate, which is used to remove tenacious polymeric coatings including epoxy paints from ferrous and non-ferrous metals. This fast, safe, and effective paint stripper does not contain any hazardous solvents. Aquastrip ACB is versatile and can be used at temperatures ranging 100° F - 180° F, however lower temperatures will result in longer strip times and higher temperatures will result in shorter bath lives. Therefore, we recommend 150° F as the optimum operating temperature.

FEATURES AND BENEFITS

- Removes most coating in sheets
- Contains non-hazardous solvents
- No flash point
- Can be used on most metals
- Biodegradable
- Easily filtered for extended bath life
- Liquid concentrate that can be diluted
- Does not contain Formic Acid

TYPICAL APPLICATIONS

- Excellent choice for removal of powder paints.
- First choice for stripping organic coating off non-ferrous metals
- Works with epoxy/polyurethane paint systems



Better Chemistry. Better Business.

Aquastrip ACB

Product Code: 2572004
Revised Date: 05/04/12

MATERIALS OF CONSTRUCTION

Use only 304 or 316 stainless steel tanks for processing.

OPERATING CONDITIONS

(Soak Tank)

Concentration:.....25-100% by volume
Temperature: 100°F - 180°F
Time:.....As required
Agitation:..... Recommended

CONTROL PROCEDURE

Titration Procedure to determine concentration of working bath for AQUASTRIP ACB:

1. Obtain 50 ml bath sample with 100 ml graduated cylinder
2. Dilute to total 100 ml with water
3. Close the top of graduated cylinder with a glass stopper
4. Invert the graduated cylinder 10 times
5. Let stand for 20 to 30 min.
6. Read the volume of the bottom layer in milliliter(ml) and record as X.
7. % Aquastrip ACB (Y) = 3.798 * X


Note: Y = Percent(%) by volume of the Aquastrip ACB in the bath
X = ml of the bottom layer



Better Chemistry. Better Business.

Aquastrip ACB

Product Code: 2572004
Revised Date: 05/04/12

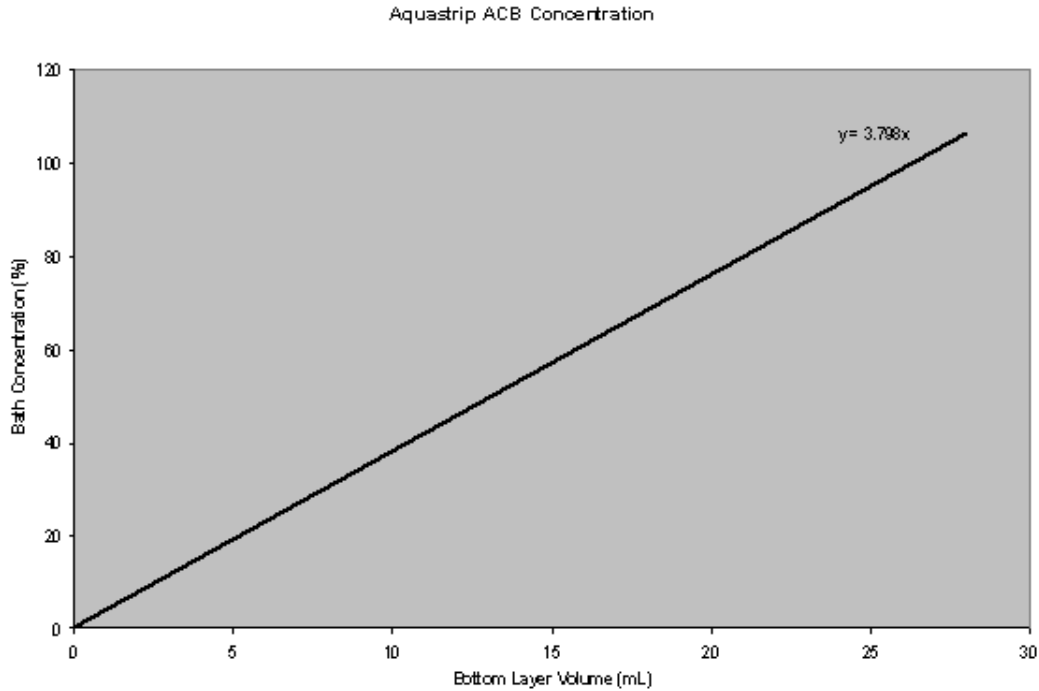

WARRANTY

THE QUALITY OF THIS PRODUCT IS GUARANTEED ON SHIPMENT FROM OUR PLANT. IF THE USE RECOMMENDATIONS ARE FOLLOWED, DESIRED RESULTS WILL BE OBTAINED. SINCE THE USE OF OUR PRODUCTS IS BEYOND OUR CONTROL, NO GUARANTEE EXPRESSED OR IMPLIED IS MADE AS TO THE EFFECTS OF SUCH USE, OR THE RESULTS TO BE OBTAINED.